


Low Smoke And No Halogen Plastic Wiring Ducts / Panduit Plastic Wireway Flame Retardant

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Qiaoguang
- Minimum Order Quantity: Negotiation
- Price: Negotiation
- Packaging Details: Carton, Negotiation
- Delivery Time: 2 days after receiving full payment
- Payment Terms: L/C, T/T, Western Union, Paypal, ALiPay
- Supply Ability: 20000pcs

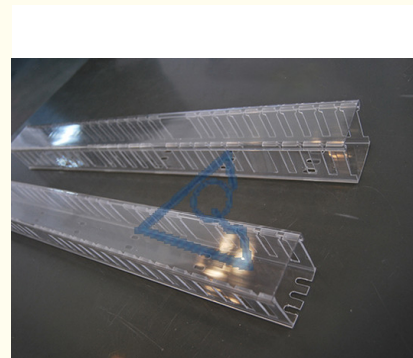


Product Specification

- Features: Good Toughness, Environmental Protection, Flame Retardant, Low Smoke, Halogen-free, Non-toxic, High And Low Temperature Resistance, Etc
- Material: PC (imported Flame Retardant Material)
- Working Temperature: -40~ 130
- Scope Of Application: It Is Suitable For Wiring Of Various Power Distribution Cabinets And Distribution Systems, And Has Been Widely Used In Rail Vehicles, Subways, Nuclear Power, Automobiles, Ships, Aerospace, Communication Equipment And Other Industries
- Product Certification: JB/T 9660-1999 Type Test, High And Low Temperature Test, EN45545, DIN5510, NFPA130, NFF16-101, BS6853 Standard
- Mounting Holes: The Standard Of Conventional Mounting Holes Is As Follows
- Customization: Support


Product Description

Low Smoke and No Halogen Cable Duct


1. Material: PC (imported flame retardant material); working temperature: -40~ 130 ;
2. Features: good toughness, environmental protection, flame retardant, low smoke, halogen-free, non-toxic, high and low temperature resistance, etc.;
3. Scope of application: It is suitable for wiring of various power distribution cabinets and distribution systems, and has been widely used in rail vehicles, subways, nuclear power, automobiles, ships, aerospace, communication equipment and other industries.
4. Product certification: JB/T 9660-1999 type test, high and low temperature test, EN45545, DIN5510, NFPA130, NFF16-101, BS6853 standard;
5. Product specifications: see the attachment < < List of communication slot specifications > >;
6. Mounting holes: The standard of conventional mounting holes is as follows;
7. The size of the outlet hole and the bottom mounting hole can also be customized according to customer requirements;

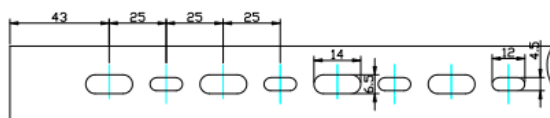

Suitable for slot width 20-60mm

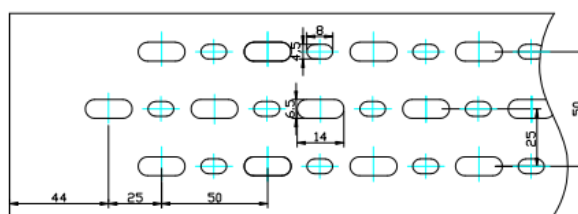

Suitable for wire slot width 75mm and above

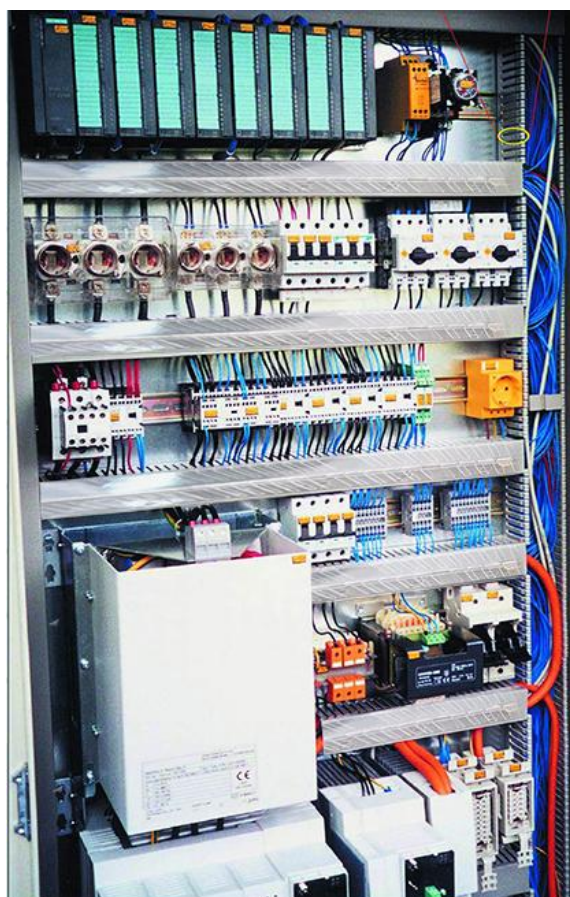

Communication cable slot specification list

Specifications and models	high	width	Ordinary tooth	fine teeth	Bottom hole spacing	wall thickness	length
TXC-2525	25	25	6*8	/	50	1.7±0.25	2m/pcs
TXC-3030	30	30	6*8	/	50	1.75±0.25	2m/pcs
TXC-3232	32	32	6*8	/	50	1.75±0.25	2m/pcs
TXC-3535	35	35	7*8	/	50	1.75±0.25	2m/pcs

TXC-3725	37	25	7*8	/	50	1.75±0.25	2m/pcs
TXC-375375	37.5	37.5	7*8	/	50	1.75±0.25	2m/pcs
TXC-37550	37.5	50	7*8	/	50	1.75±0.25	2m/pcs
TXC-4025	40	25	7*8	/	50	1.9±0.25	2m/pcs
TXC-4030	40	30	7*8	/	50	1.9±0.25	2m/pcs
TXC-4040	40	40	7*8	/	50	1.9±0.25	2m/pcs
TXC-4060	40	60	7*8	/	50	1.9±0.25	2m/pcs
TXC-4080	40	80	7*8	/	50	1.9±0.25	2m/pcs
TXC-5020	50	20	7*8	4*6	50	2.0±0.25	2m/pcs
TXC-5025	50	25	7*8	4*6	50	2.0±0.25	2m/pcs
TXC-5030	50	30	7*8	4*6	50	2.0±0.25	2m/pcs
TXC-5035	50	35	7*8	4*6	50	2.0±0.25	2m/pcs
TXC-50375	50	37.5	7*8	4*6	50	2.0±0.25	2m/pcs
TXC-5040	50	40	7*8	4*6	50	2.0±0.25	2m/pcs
TXC-5045	50	45	7*8	4*6	50	2.0±0.25	2m/pcs
TXC-5050	50	50	7*8	4*6	50	2.0±0.25	2m/pcs
TXC-5055	50	55	7*8	4*6	50	2.0±0.25	2m/pcs
TXC-5060	50	60	7*8	4*6	50	2.0±0.25	2m/pcs
TXC-5075	50	75	7*8	5*7.5	50	2.0±0.25	2m/pcs
TXC-5080	50	80	7*8	4*6	50	2.0±0.25	2m/pcs
TXC-6025	60	25	9*9	6*6	50	2.0±0.25	2m/pcs
TXC-6030	60	30	9*9	6*6	50	2.0±0.25	2m/pcs
TXC-6040	60	40	9*9	6*6	50	2.0±0.25	2m/pcs
TXC-6050	60	50	9*9	6*6	50	2.0±0.25	2m/pcs
TXC-6060	60	60	9*9	6*6	50	2.0±0.25	2m/pcs
TXC-6080	60	80	9*9	6*6	50	2.0±0.25	2m/pcs
TXC-7525	75	25	8*10	5*7.5	50	2.0±0.25	2m/pcs
TXC-7537	75	37.5	8*10	5*7.5	50	2.0±0.25	2m/pcs
TXC-7550	75	50	8*10	5*7.5	50	2.0±0.25	2m/pcs
TXC-7575	75	75	8*10	5*7.5	50	2.0±0.25	2m/pcs
TXC-75100	75	100	8*10	5*7.5	50	2.0±0.25	2m/pcs
TXC-8025	80	25	8*10	6*8	50	2.0±0.25	2m/pcs
TXC-8030	80	30	8*10	6*8	50	2.0±0.25	2m/pcs
TXC-8035	80	35	8*10	6*8	50	2.0±0.25	2m/pcs
TXC-8040	80	40	8*10	6*8	50	2.0±0.25	2m/pcs
TXC-8045	80	45	8*10	6*8	50	2.0±0.25	2m/pcs
TXC-8050	80	50	8*10	6*8	50	2.0±0.25	2m/pcs
TXC-8055	80	55	8*10	6*8	50	2.0±0.25	2m/pcs
TXC-8060	80	60	8*10	6*8	50	2.0±0.25	2m/pcs
TXC-8080	80	80	8*10	6*8	50	2.0±0.25	2m/pcs
TXC-80100	80	100	8*10	6*8	50	2.0±0.25	2m/pcs
TXC-80120	80	120	8*10	6*8	50	2.0±0.25	2m/pcs
TXC-10033	100	33	10*11	/	50	2.0±0.25	2m/pcs
TXC-10040	100	40	10*11	/	50	2.0±0.25	2m/pcs
TXC-10050	100	50	10*11	/	50	2.0±0.25	2m/pcs
TXC-10060	100	60	10*11	/	50	2.0±0.25	2m/pcs
TXC-10075	100	75	10*11	/	50	2.0±0.25	2m/pcs
TXC-10080	100	80	10*11	/	50	2.0±0.25	2m/pcs
TXC-100100	100	100	10*11	/	50	2.0±0.25	2m/pcs

